
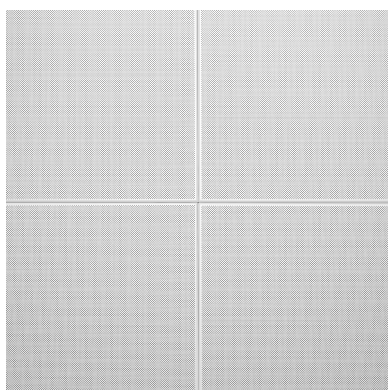



PRODUCT INFO

## CLIP-IN 45 PERFO Rd

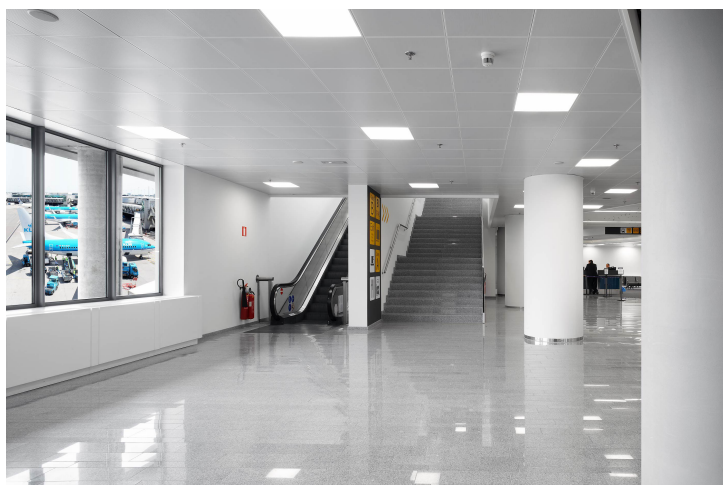

- Round perforations ( $\varnothing = 1.5$  mm) with an interval of 4 mm and a free passage of 22%.
- Other perforation patterns available on request.
- The four edges are bevelled off at a 45° angle.  
This creates a shadow joint between the tiles.
- Provided with a glued-in acoustic membrane.
- Pre-painted finish.
- Each panel is covered in a foil that is easy to remove in order to prevent any damage.
- Standard colour metallic silver or white. Other colours available on request.

ceilux 45 Rd22	45001D



Fire reaction pre and postpainted tiles: A2s1d0  
Release of dangerous substances: none  
Flexion resistance: Classe 1  
Durability galvanized tiles: B  
Durability pre and post-painted tiles: C

### Sound Absorption with acoustic membrane

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC	aw
0.42	0,82	0,79	0,67	0,74	0,74	0,61	0,75

### Sound Absorption with acoustic membrane + insulating mat

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC	aw
0.41	0,67	0,88	0,75	0,79	0,68	0,53	0,80

Sound attenuation with acoustic membrane  $D_{n,cw}$ : 25.0

Sound attenuation with acoustic membrane + insulating mat ( $D_{n,cw}$ ): 43.0