
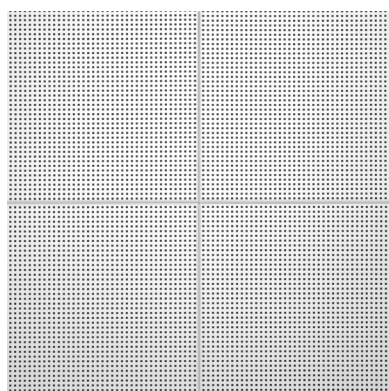


PRODUCT INFO

CLIP-IN 90 PERFO Q

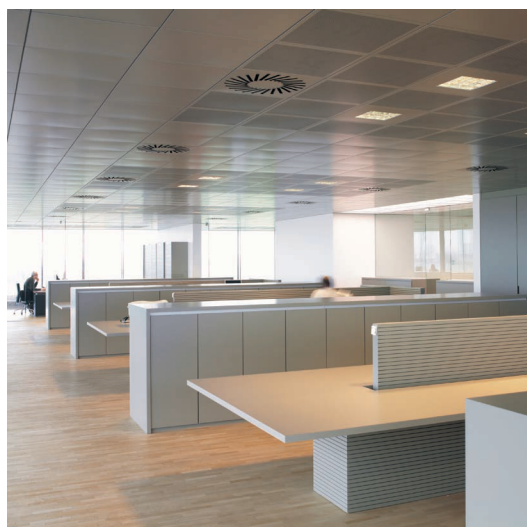

- Square perforations of 4 mm with an interval of 5 mm. Free passage of 30%.
- Other perforation patterns available on request.
- The four edges are folded over at a 90° angle, resulting in a shadow joint of 7 mm
- Due to the high degree of permeability of the Q tiles, they are extremely well suited for use as ventilation extraction tiles. Also available with plenum.
- Provided with a glued-in acoustic membrane.
- Pre-painted finish.
- Each panel is covered in a foil that is easy to remove in order to prevent any damage.
- Standard colour metallic silver or white. Other colours available on request.

600 x 600 mm	45013


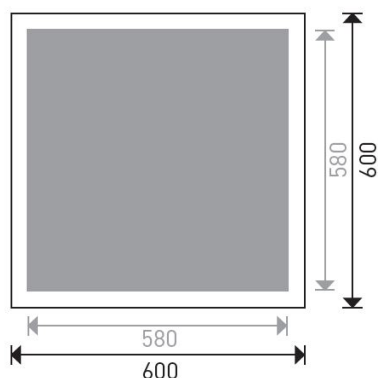


Tableau de sélection avec des hauteurs de plafond entre 2.5 - 4m:

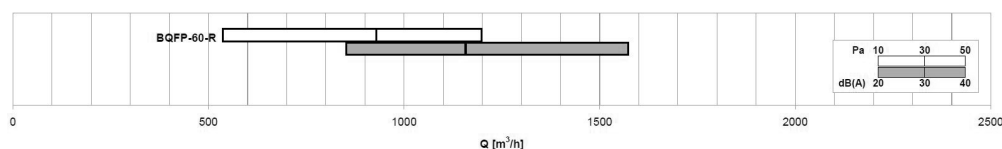

Model	A _v [m²]	Q [m³/h]		L _{WA} [dB (A)]		X _{10,25} -Y _{10,25} [m]		D _p [Pa]	
		min	max	min	max	min	max	min	max
BQFP-60-R	0,1431	540	1200	<20	31	-	-	10	50

Fire reaction pre and postpainted tiles: A2s1do
 Release of dangerous substances: none
 Flexion resistance: Classe 1
 Durability galvanized tiles: B
 Durability pre and post-painted tiles: C