
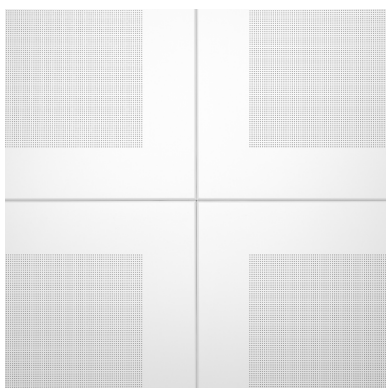



PRODUCT INFO

CLIP-IN 90 PERFO R10

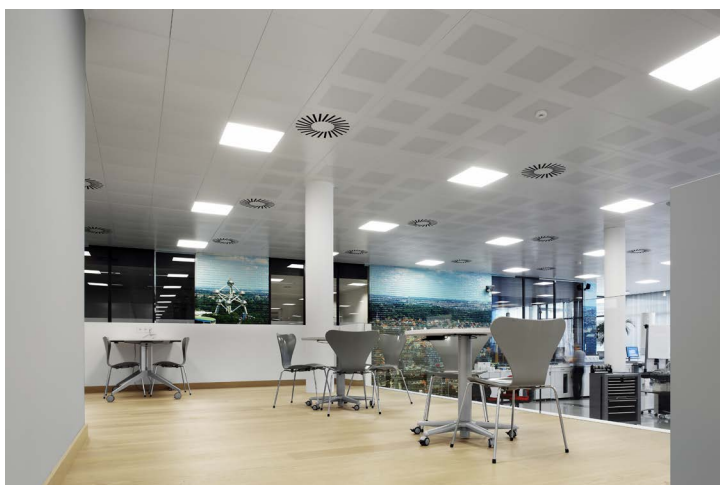

- Tile with a non-perforated edge of 100 mm and a perforation pattern in the center ($\varnothing = 1.5$ mm) at an interval of 2.5 mm. Free passage of 6%.
- Other perforation patterns available on request.
- The four edges are folded over at a 90° angle, resulting in a shadow joint of 7 mm.
- Provided with a glued-in acoustic membrane.
- Pre-painted finish.
- Each panel is covered in a foil that is easy to remove in order to prevent any damage.
- Standard colour metallic silver or white. Other colours available on request.

600 x 600 mm	45011

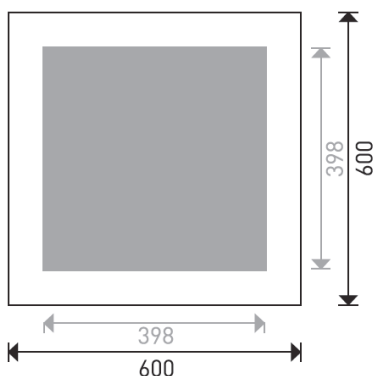

Sound absorption with acoustic membrane.

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0,29	0,67	0,63	0,40	0,37	0,34	0,50

Sound absorption with acoustic membrane + 30 mm insulation mat.

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0,46	0,71	0,65	0,54	0,49	0,41	0,60

Fire reaction pre and postpainted tiles: A2s1d0
Release of dangerous substances: none
Flexion resistance: Classe 1
Durability galvanized tiles: B
Durability pre and post-painted tiles: C