
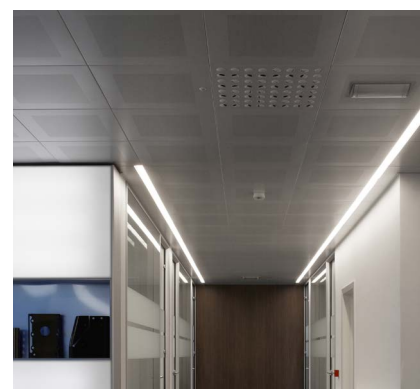



PRODUCT INFO

## LAY-IN DROP NOZZLE



- 600 x 600 mm.
- The lay-in ventilation tile fitted with 360° adjustable polycarbonate ABS disks.
- Exterior dimensions 600 x 600 mm, visible ceiling area 585 x 585 mm.
  - Mounted in a T15 structure.
- Exterior dimensions 600 x 600 mm, visible ceiling area 575 x 575 mm.
  - Mounted in a T24 structure.
- The panels have a recess of 8 mm this creates a shadow joint when installed.
- Nozzle disks are available in grey and white.
- Additional, a plenum is available with a side connector of 160 or 200 mm.
- Pre-painted finish.

ceilux 45	56001

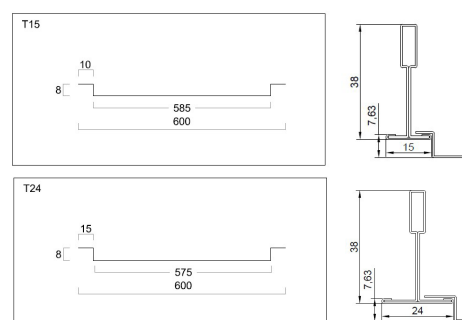

### LAY-IN NOZZLE R

64 diffusers

Installation height	min - max	2.2-3.3	2.7-3.4	2.8-3.4	2.9-3.5	3.0-3.6	3.1-3.7	3.2-3.9	3.4-4.0	3.4-4.1
Noise level (dB)	dB	<20	20	25	30	35	40	45	50	55
Air delivery speed	m/s	2	3	4	5	6	8	9	10	12
Pressure drop	Pa	7	13	22	32	43	70	86	103	140
Air/flow	m <sup>3</sup> /h	119	178	238	298	357	476	535	594	714
Throw	m	0.9	1.4	1.8	2.3	2.8	3.7	4.2	4.6	5.5

### LAY-IN NOZZLE R10

36 diffusers

Installation height	min - max	2.2-3.3	2.7-3.4	2.8-3.4	2.9-3.5	3.0-3.6	3.1-3.7	3.2-3.9	3.4-4.0	3.4-4.1
Noise level (dB)	dB	<20	20	25	30	35	40	45	50	55
Air delivery speed	m/s	2	3	4	5	6	8	9	10	12
Pressure drop	Pa	7	13	22	32	43	70	86	103	140
Air/flow	m <sup>3</sup> /h	67	100	134	167	201	268	301	334	401
Throw	m	0.5	0.8	1.0	1.3	1.5	2.1	2.3	2.6	3.1

Fire reaction pre and postpainted tiles: A2s1d0  
 Release of dangerous substances: none  
 Flexion resistance: Classe 1  
 Durability galvanized tiles: B  
 Durability pre and post-painted tiles: C