
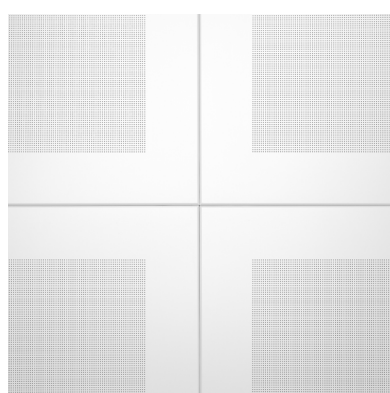


LAY-IN DROP PERFO R10

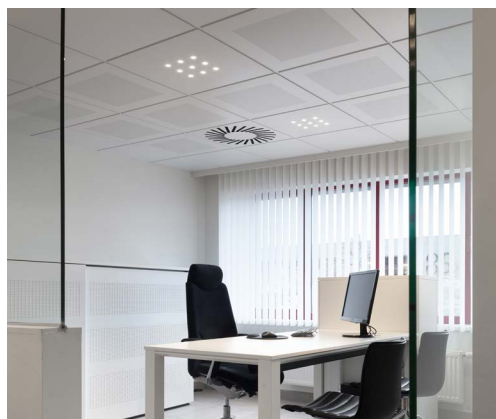

- Tile with a non-perforated edge of 100 mm and a perforation pattern in the center ($\varnothing = 1.5$ mm) at an interval of 2.5 mm. Free passage of 6%.
- Other perforation patterns available on request.
- Provided with a glued-in acoustic membrane.
- Exterior dimensions 600 x 600 mm, visible ceiling area 585 x 585 mm.
■ Mounted in a T15 structure.
- Exterior dimensions 600 x 600 mm, visible ceiling area 575 x 575 mm.
■ Mounted in a T24 structure.
- The panels have a recess of 8 mm this creates a shadow joint when installed.
- Pre-painted finish.
- Each panel is covered in a foil that is easy to remove in order to prevent any damage.
- Standard colour metallic silver or white. Other colours available on request.






Sound absorption with acoustic membrane.

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0,29	0,67	0,63	0,40	0,37	0,34	0,50

Sound absorption with acoustic membrane + 30 mm insulation mat.

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0,46	0,71	0,65	0,54	0,49	0,41	0,60

600 x 600 mm	46002

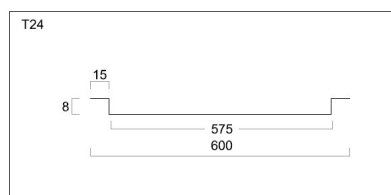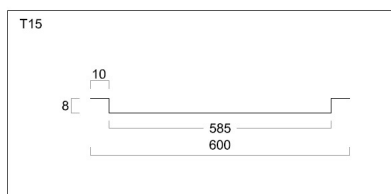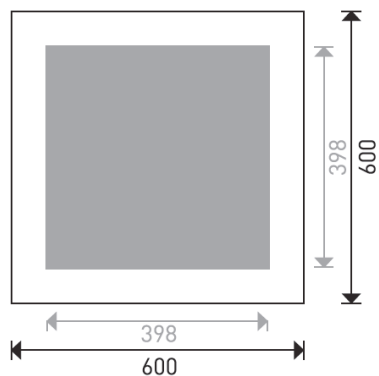

Fire reaction pre and postpainted tiles: A2s1d0
 Release of dangerous substances: none
 Flexion resistance: Classe 1
 Durability galvanized tiles: B
 Durability pre and post-painted tiles: C