

## LAY-IN FLAT VENTILO






- Pulsion tile equipped with 12 or 24 blades (163 x 200 mm) that ensure even air distribution.
- Additional, plenums can also be made with a diameter of 160 mm / 200 mm for this.
- Mounted in a T24-structure.
- The lay-in flat panels have exterior dimensions of 600 x 600 mm; the visible ceiling area measures 575 x 575 mm and can be mounted in a T24 support structure.
- The panels have a 2 mm recess on the edges. This results in a smooth ceiling surface.
- Pre-painted finish.
- Standard colour metallic silver or white. Other colours available on request.

600 x 600 mm	56000



	Ak(m <sup>2</sup> )	Q (m <sup>3</sup> /h)		L <sub>WA</sub> [dB[A]]		X <sub>i(0,20)</sub> [M]		Dp <sub>t</sub> [Pa]	
		min	max	min	max	min	max	min	max
V 12	0.0142	220	390	30	48	1.7	3.3	10	50
V 24	0.0449	530	1040	26	42	2.9	5.6	10	50

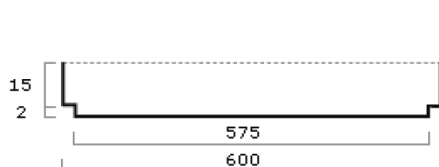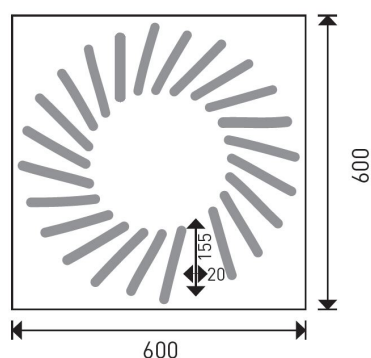

Fire reaction pre and postpainted tiles: A2s1do  
 Release of dangerous substances: none  
 Flexion resistance: Classe 1  
 Durability galvanized tiles: B  
 Durability pre and post-painted tiles: C