

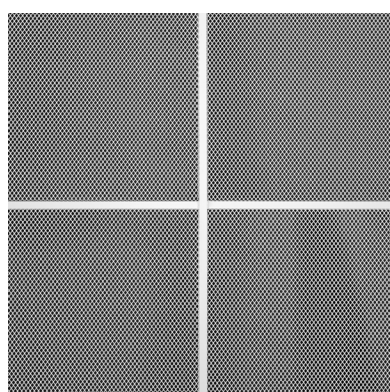
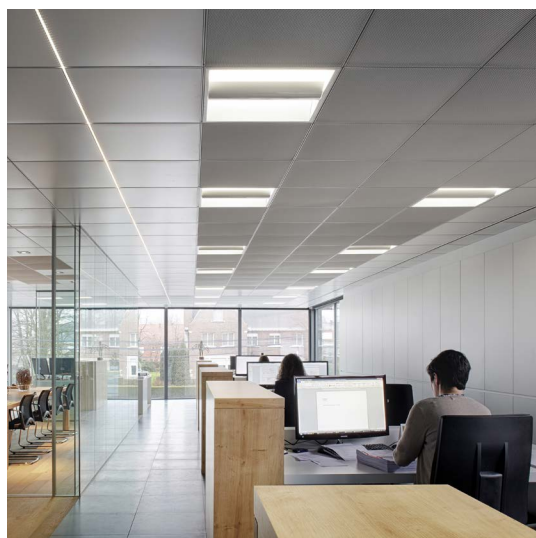


LAY-IN DROP STRETCH

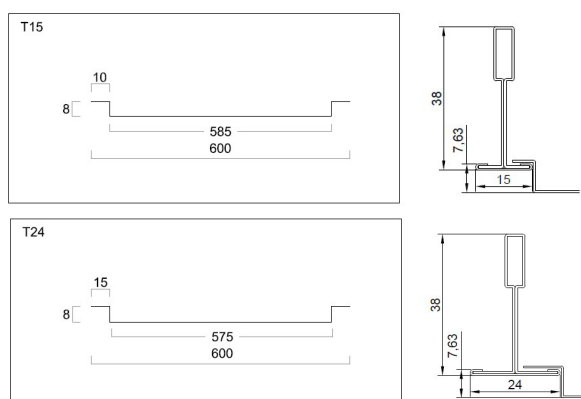

- The panels are made of zinc galvanised drawn steel of the Q10 stretch type. Other types available on request.
- The panels can be covered with an insulation mat (art. 46040) that can be installed with either the black or the white side towards the panel.
- Exterior dimensions 600 x 600 mm, visible ceiling area 585 x 585 mm.
 - Mounted in a T15 structure.
- Exterior dimensions 600 x 600 mm, visible ceiling area 575 x 575 mm.
 - Mounted in a T24 structure.
- The panels have a recess of 8 mm this creates a shadow joint when installed.
- Standard colour metallic silver or white. Other colours available on request.
- Each panel is covered in a foil that is easy to remove in order to prevent any damage.

585 x 585	47000

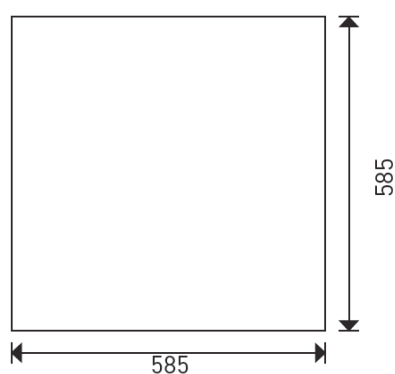

Fire reaction pre and postpainted tiles: A1
 Release of dangerous substances: none
 Flexion resistance: Classe 1
 Durability galvanized tiles: B
 Durability pre and post-painted tiles: C