





LAY-IN FLAT STRETCH

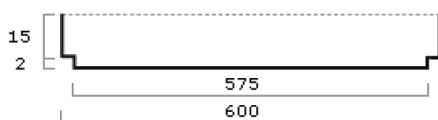

- The panels are made of zinc galvanised drawn steel of the Q10 stretch type. Other types on demand.
- The panels can be covered with an insulation mat (art. 46040) that can be installed with either the black or the white side towards the panel.
- Mounted in a T24-structure.
- The lay-in flat panels have exterior dimensions of 600 x 600 mm; the visible ceiling area measures 575 x 575 mm and can be mounted in a T24 support structure.
- The panels have a 2 mm recess on the edges. This results in a smooth ceiling surface.
- Standard colour metallic silver or white. Other colours available on request.

575 x 575	47000F



Fire reaction pre and postpainted tiles: A2s1do
 Release of dangerous substances: none
 Flexion resistance: Classe 1
 Durability galvanized tiles: B
 Durability pre and post-painted tiles: C