
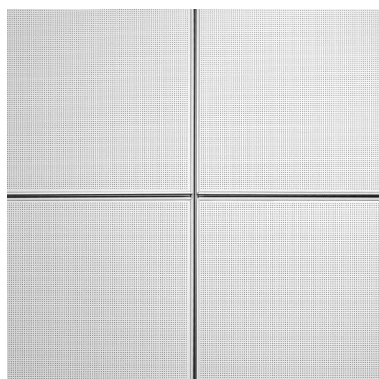


## LAY-IN COLORLINE PERFO R

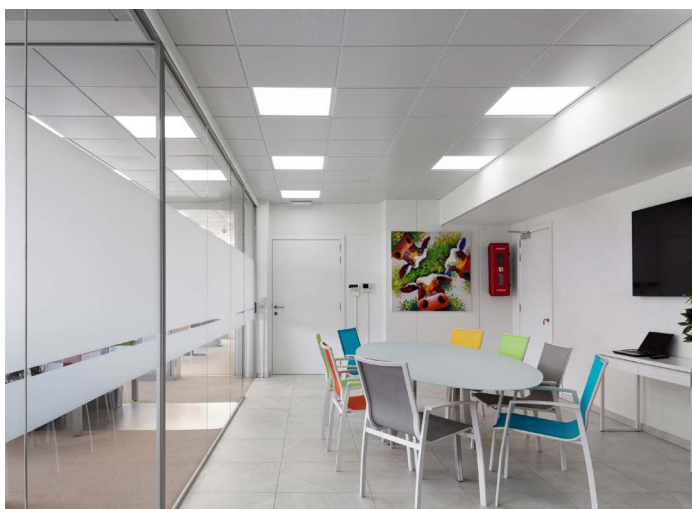

- Round perforations of  $\varnothing$  1.5 mm with an intermediate distance of 2.5 mm.
- Free passage section of 11%
- Other perforation patterns available on request.
- Provided with a glued-in acoustic membrane.
- Pre-painted finish.
- Each panel is covered in a foil that is easy to remove in order to prevent any damage.
- Standard colour metallic silver or white. Other colours available on request.

### Sound absorption with acoustic membrane.


125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC	aw
0,38	0,80	0,83	0,64	0,70	0,70	0,59	0,75

600 x 600 mm	46001
--------------	-------



### Sound absorption with acoustic membrane + 30 mm insulation mat.

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC	aw
0,31	0,60	0,80	0,69	0,80	0,79	0,57	0,80

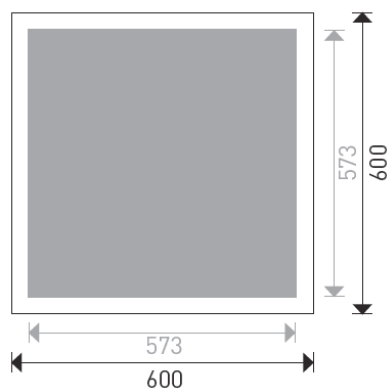

Fire reaction pre and postpainted tiles: A2s1d0  
 Release of dangerous substances: none  
 Flexion resistance: Classe 1  
 Durability galvanized tiles: B  
 Durability pre and post-painted tiles: C